

SG SERIES

SOLAR GEL DEEP CYCLE

NEWMAX Solar gel batteries are true maintenance-free sealed batteries engineered specially to satisfy the need for frequent deep cycles from PVs and renewable energy storage applications. We are confident that our technology-intensive, long-lasting, and environment friendly SG batteries will provide stability and efficiency for your everyday renewable energy needs.



SG 1000H (12V100AH/C₂₀)

ACTIVE CARBON Premium Battery




- | | | | | | | | |
|---|--------------------|--|-------------------------|---|------------------|--|---------------|
| 01 | Longer Life | 02 | Maintenance Free | 03 | Leak Free | 04 | Safety |
| High density, anti-corrosion lead calcium alloy is used in harmony with the GEL electrolyte to reduce the sulfation effect significantly. | | NEWMAX battery has a gas recombining design that doesn't need maintenance until the end of its life. | | Gel Technology is applied to prevent leakage. They won't spill even if the battery is tipped upside down. | | Specially designed anti-explosion filter and safety valves prevent gas leakage when overcharged. | |


*** The color and the printed specifications of the products are subject to change without prior notice.

General Features

- ◆ Plate: Paste type with Carbon Active Material
- ◆ Battery type: Sealed VRLA Maintenance Free Type / Non-spillable construction design
- ◆ Case/cover mat: High-stiffness engineering PP plastic (Heat Deflection Temp. 140°C) RoHS Compliant EU Directive 2002/95/EC
- ◆ Safety performance: Safety valve & flame arrestor installation for explosion proof.
- ◆ High quality, high reliability and low self discharge rate
- ◆ Exceptional deep discharge recovery performance
- ◆ Flexibility design for multiple install positions (Position Free, GEL Technology)
- ◆ Designed in accordance with and published in compliance with applicable IEC and BS EN, KS stds.
- IEC 60896-21/22 Stationary lead-acid batteries – Valve regulated types
- BS EN 61427 Secondary cells and batteries for photovoltaic energy systems (PVES)
- KS C 8518 Stationary sealed lead-acid batteries – Valve regulated types



Standard



M1-01

Technical Features



Premium ActiveCarbon™

In every Newmax battery, proprietary micro carbon additive is used in the active material for both positive and negative plates to enhance charge acceptance and cycle endurance. ActiveCarbon™ works to strengthen charge pathways to improve performance consistency and enhance performance at partial state of charge (PSoC) environment.



MaxPress™ Grid Technology

Patent pending grid compressing technology which increases the density of the lead grain of the grids. The grain density is typically 400% greater than that of the conventional casting method. This up-to-date grid technology enables our batteries to survive even the toughest deep discharge and PSoC applications.



ThixoPure™ GEL Technology

Application of refined pure thixotropic colloidal silica GEL technology to battery electrolyte has greatly increased the cycle life by both preventing plate stratification and providing extra temperature protection against heat and cold. We are the first Korean company to successfully commercialize the GEL technology in the VRLA battery industry.



FlexSealing™ Anti Explosion Filter

Patent pending proprietary cap filtering and sealing technology. Battery cell caps are sealed simultaneously using specially designed o-rings and explosion filters to prevent leakage and gassing more effectively than ever before.












Highly Resistive Heat Protection Case

Specially formulated heat and flame resistant polypropylene case material is used to effectively block ambient heat thus preventing heat related malfunctions such as thermal runaway. This proprietary high rigidity case material has heat deflection rating of 140°C and complies to RoHS Compliant EU Directive 2002/95/EC. Additional UL94-V0 protection option also available.

Operating temperature range

Discharge	Charge	Storage
-20°C ~ 60°C	0°C ~ 50°C	-20°C ~ 60°C

Battery Model	SG 1000H (12V 100AH / 20 HOUR RATE)			
Nominal Capacity (@25°C)	20HR (1.80VPC) 100Ah	10HR (1.80VPC) 93Ah	5HR (1.70VPC) 84Ah	1HR (1.60VPC) 61Ah
Dimensions (mm/inch)	Length 371(14.60)	Width 174(6.85)	Height 205(8.07)	Total Height 219(8.62)
Weight (kg/lbs)	30.0kg(66.14 lbs)±3%			
Internal resistance (mΩ)	≤5.00mΩ(25°C, 77°F)			
Max. discharge current (5 sec.)	760 A	Max. discharge current(continuous)		285 A
Capacity affected by Temperature	@30°C(86°F) 105%	@25°C(77°F) 103%	@10°C(50°F) 95%	@-10°C(14°F) 78%
Self-discharge (@25°C,77°F)	After 1 month ≤2%		After 3 month ≤6%	After 6 month ≤12%
Max. short duration discharge current (0.1sec)	1,900A±10%			
Recommended charging (@25°C)	1 st Bulk Step	2 nd Absorption Step		3 rd Floating Step
Solar system	0.20~0.25C CC	2.40V/cell CV,(cut-off A : 0.005C)		2.28V/cell CV

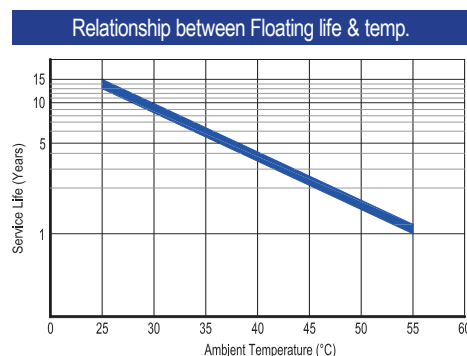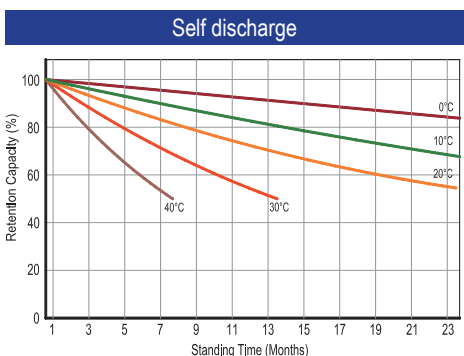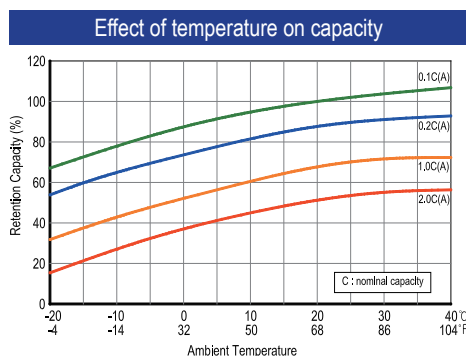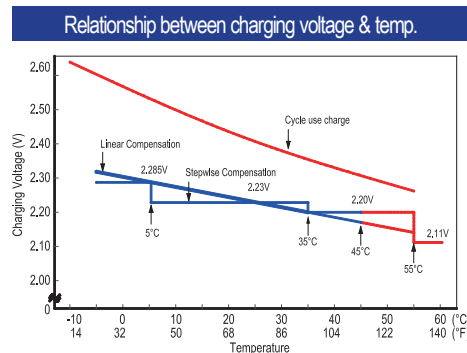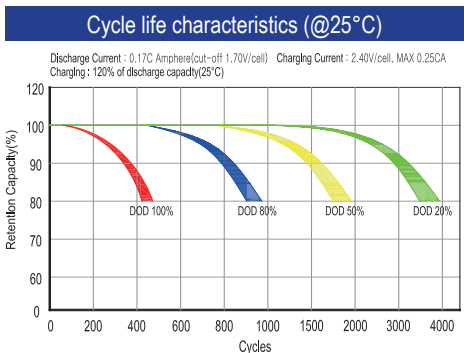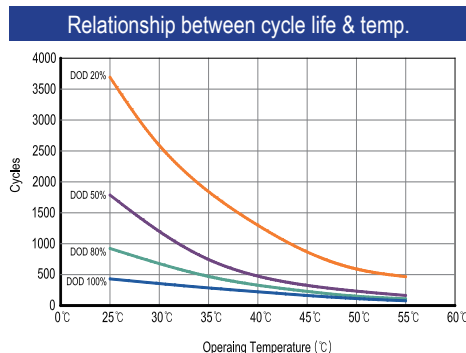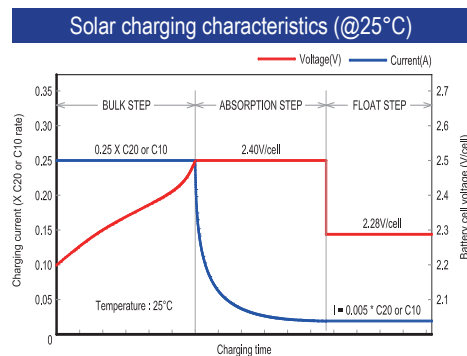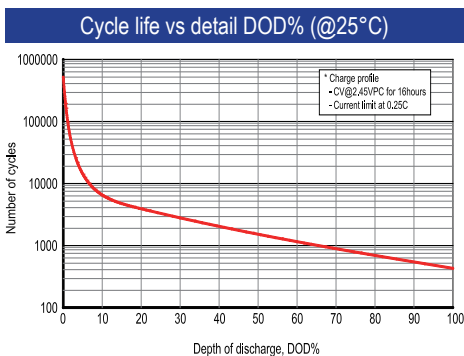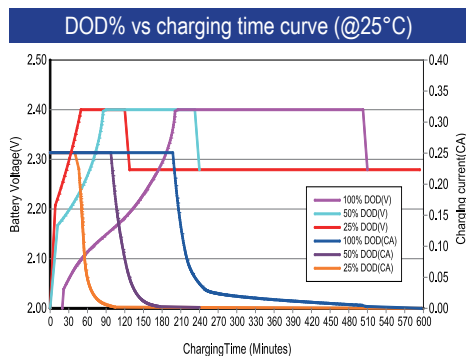

Constant current discharge ratings –Amperes per cell @ 25°C

V/cell	Minutes						Hours					
	5	10	15	20	30	40	1	3	5	8	10	20
1.85V	82.8	80.9	79.5	76.9	65.6	59.2	46.9	21.9	14.4	9.6	8.48	4.59
1.80V	121	116	103	92.3	77.7	67.4	52.5	23.7	15.7	10.3	9.25	5.00
1.75V	140	129	113	100	80.6	71.6	55.1	23.9	16.1	10.5	9.26	5.01
1.70V	159	141	121	106	84.1	74.0	57.0	24.7	16.8	10.8	9.27	5.01
1.65V	177	154	130	112	88.6	76.1	58.7	25.5	17.0	10.9	9.31	5.03
1.60V	199	168	140	119	93.8	79.8	60.8	26.4	17.6	11.1	9.41	5.09

Constant power discharge ratings –Watts per cell @ 25°C

V/cell	Minutes						Hours					
	5	10	15	20	30	40	1	3	5	8	10	20
1.85V	153	150	147	142	123	112	89.0	42.0	27.8	18.7	16.5	8.94
1.80V	217	208	185	168	142	125	98.6	45.1	30.1	19.9	17.9	9.70
1.75V	245	230	201	180	147	132	103	45.5	30.8	20.2	18.0	9.71
1.70V	270	241	216	190	153	135	106	46.9	32.1	20.9	18.0	9.72
1.65V	296	265	227	199	159	138	110	48.3	32.5	21.3	18.1	9.78
1.60V	324	282	241	210	168	144	112	49.7	33.3	21.4	18.3	9.90